## NOTES:

A | INITIAL RELEASE

05-08-96

\_ ××

REVISIONS

1. MATERIALS AND FINISH:
INSULATOR— GLASS FILLED THERMO—PLASTIC
POLYESTER, 94V—0 RATED, BLACK.

FLOATING BUSHING - BRASS 260 CONTACTS- PHOSPHORE BRONZE

CONTACT PLATING- .000030 Au OVER .000050 Ni ON CONTACT POINT, TAIL .000100 MATE FINISH 60/40 SnPb BUSHING PLATING- .000050 Ni ALL OVER.

## 2. ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: CONTACT TO DAUGHTER CARD- 20 MILLIOHMS.


OPERATING VOLTAGE- 1800 V RMS, 60 Hz. INSULATION RESISTANCE- 5000 MEGOHMS. CONTACT CURRENT RATING- 5 AMPS AT 30°C.

## 3. MECHANICAL CHARACTERISTICS:


OPERATING TEMPERATURE- -55° TO +125°C.


DURABILITY- PER BELLCORE TR-NWT-000078.

MARKING AS SHOWN.




CONTACTS DETAIL

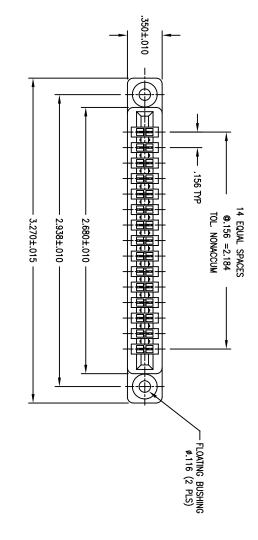

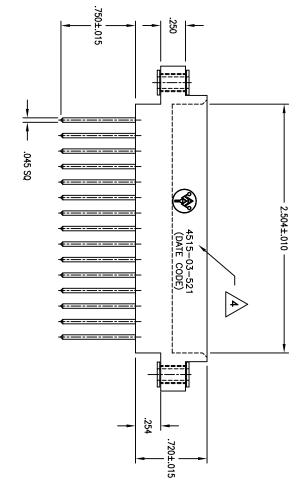

CUSTOMER DRAWING



Н ажоно

NAME





CARD EDGE CONNECTOR .156 X .188

A.W. Industries, incorporated 6788 N.W. 17th AVENUE Fort Lauderdale,FI 33309

4515-03-521

SCALE NONE AND FILE NO. 03-0333-0A SHEET 1 OF