

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE (ESR 0488)	06-06-96	JWM




**NOTES:**

- MATERIALS AND FINISH:**  
INSULATOR - GLASS FILLED THERMO-PLASTIC  
POLYESTER, 94V-0 RATED, BLACK  
CONTACTS - CDA 725  
CONTACT PLATING - .000030 AU OVER .000050 Ni ON  
CONTACT POINT, TAIL .000100 MATE FINISH 60/40 SnPb

- ELECTRICAL CHARACTERISTICS:**  
CONTACT RESISTANCE:  
CONTACT TO DAUGHTER CARD - 10 MILLIOMHS .  
DIELECTRIC WITHSTANDING VOLTAGE - 1800 VRMS.  
INSULATION RESISTANCE - 5000 MEGOHMS.  
CONTACT CURRENT RATING - 5 AMPS AT 30C.

- MECHANICAL CHARACTERISTICS:**  
OPERATING TEMPERATURE - -55 TO +125C.  
DURABILITY - PER BELLOCHE TR-NWT-000078.

MARKING AS SHOWN.

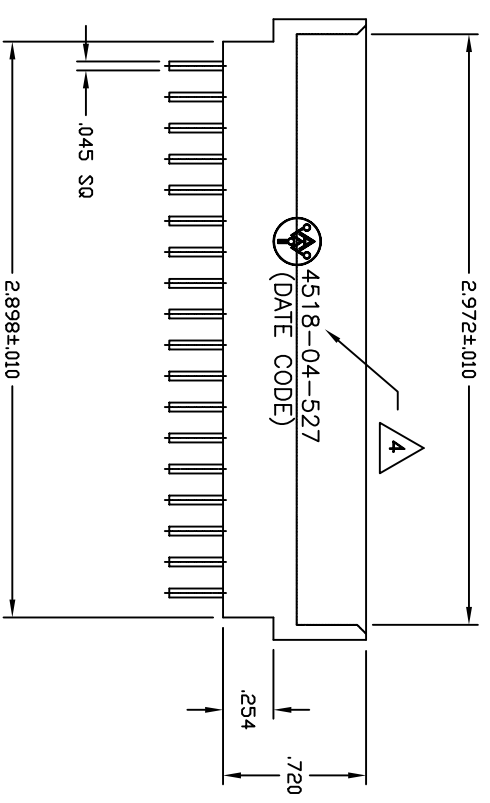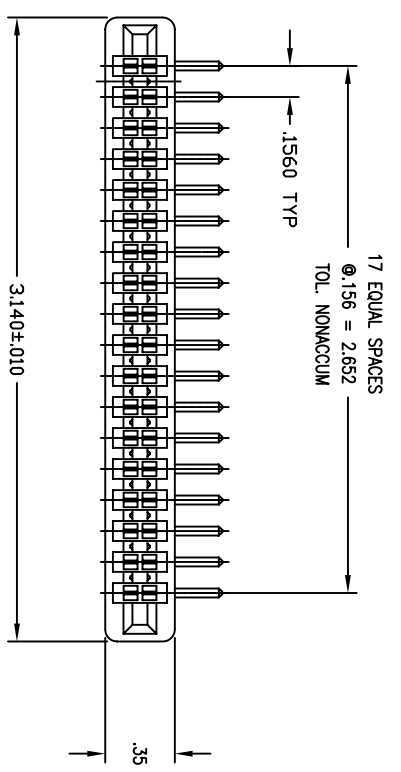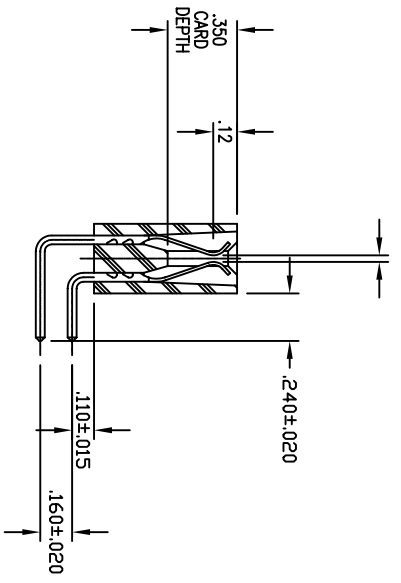

**CUSTOMER DRAWING**

APPROVED	
NAME	DATE
DESIGN JWM	06-96
CHECKED YL	06-96
QUALITY WBK	06-96
APPROVED JWM	06-96

ALL DIMENSIONS ARE IN INCHES.  
TOLERANCES:  
DECIMAL .XX ±.015  
.XXX ±.005  
ANGLE ±1/2'

THE INFORMATION, DATA AND/OR SERVICES CONTAINED ON THIS DRAWING ARE PROPRIETARY TO A.W. INDUSTRIES AND MAY NOT BE COPIED, REPRODUCED OR DISCLOSED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF A.W. INDUSTRIES.

**A.W. Industries, Incorporated**  
6788 N.W. 17th AVENUE  
Fort Lauderdale, FL 33309

CARD EDGE CONNECTOR .156 X .188  
18 POS. RIGHT ANGLE ON .200 CENTERS

SIZE C  
SCALE NONE  
DWG. NO. 4518-04-527  
SHEET 1 OF 1