REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE(SEE ESR 0287)	09-27-95	JWM
B	SEE ECN 90417	07-22-97	JWM

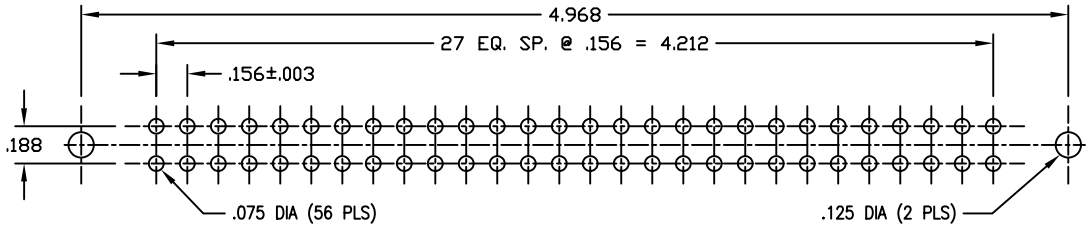

RECOMMENDED PCB LAYOUT

NOTES:

1. **MATERIALS AND FINISH:**
   INSULATOR- GLASS FILLED THERMO-PLASTIC POLYESTER, 94V-0 RATED, BLACK.
   CONTACTS- CDA 725
   CONTACT PLATING- .000030 Au OVER .000050 Ni ON CONTACT POINT, TAIL .000100 MATE FINISH 60/40 SnPb

2. **ELECTRICAL CHARACTERISTICS:**
   CONTACT RESISTANCE:
   CONTACT TO DAUGHTER CARD- 10 MILLIOHMS .
   OPERATING VOLTAGE- 1800 VDC.
   INSULATION RESISTANCE- 5000 MEGOHMS.
   CONTACT CURRENT RATING- 5 AMPS AT 30°C.

3. **MECHANICAL CHARACTERISTICS:**
   OPERATING TEMPERATURE- -55° TO +125°C.
   DURABILITY- PER BELLCORE TR-NWT-000078.

4. MARKING AS SHOWN.
   PIN ID NUMBERS OPTIONAL.

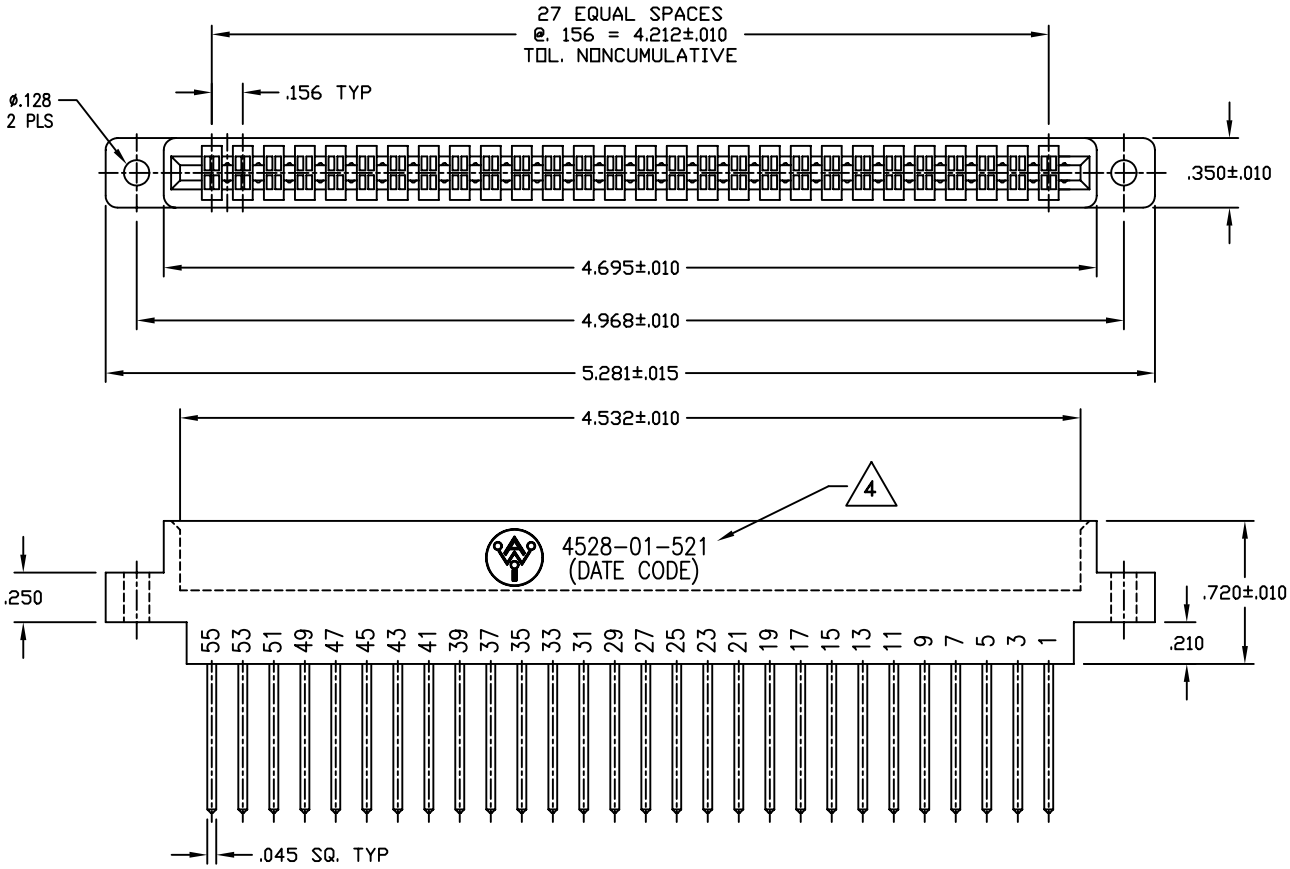

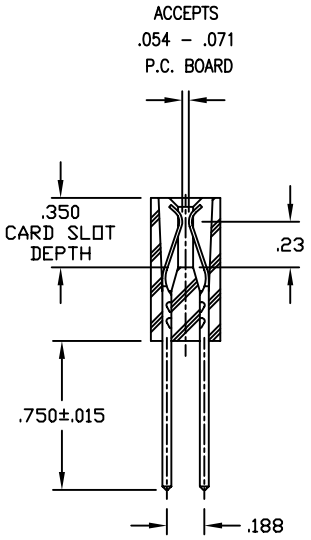

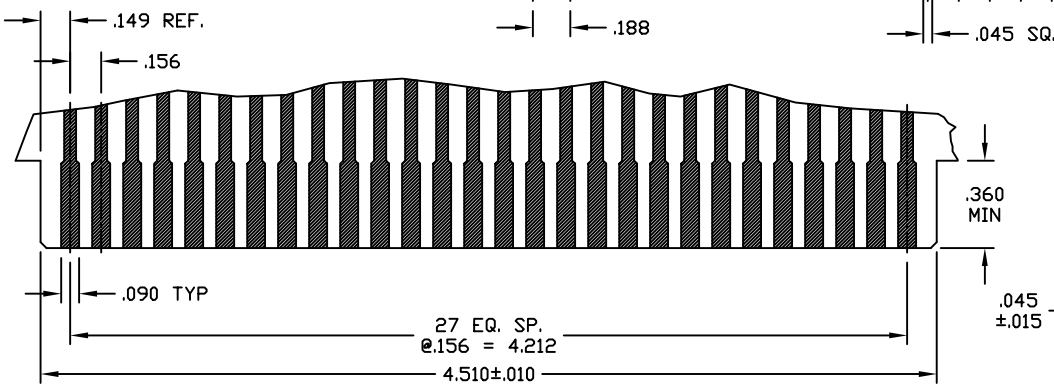



RECOMENDED DAUTHER BOARD

CUSTOMER DRAWING

APPROVED		
	NAME	DATE
DRAWN	JWM	09-95
CHECKED	YL	09-95
QUALITY	WBK	09-95
APPROVED	JWM	09-95

THE INFORMATION, DATA AND/OR SPECIFICATIONS CONTAINED ON THIS DOCUMENT ARE PROPRIETARY TO A.W. INDUSTRIES AND MAY NOT BE COPIED, DUPLICATED OR DISCLOSED IN PART OR WHOLE WITHOUT AUTHORIZATION IN WRITING FROM A.W. INDUSTRIES.

ALL DIMENSIONS ARE IN INCHES.

TOLERANCES:
DECIMAL .XX ±.015
.XXX ±.005
ANGLE ±1/2°

TITLE: CARD EDGE CONNECTOR
.156 X .188 CENTERS

A.W. Industries, incorporated
6788 N.W. 17th AVENUE
Fort Lauderdale,Fl 33309

SIZE C | DWG. NO. 4528-01-521
SCALE NONE | ACAD FILE NO. 03-0278-0B | SHEET 1 OF 1