
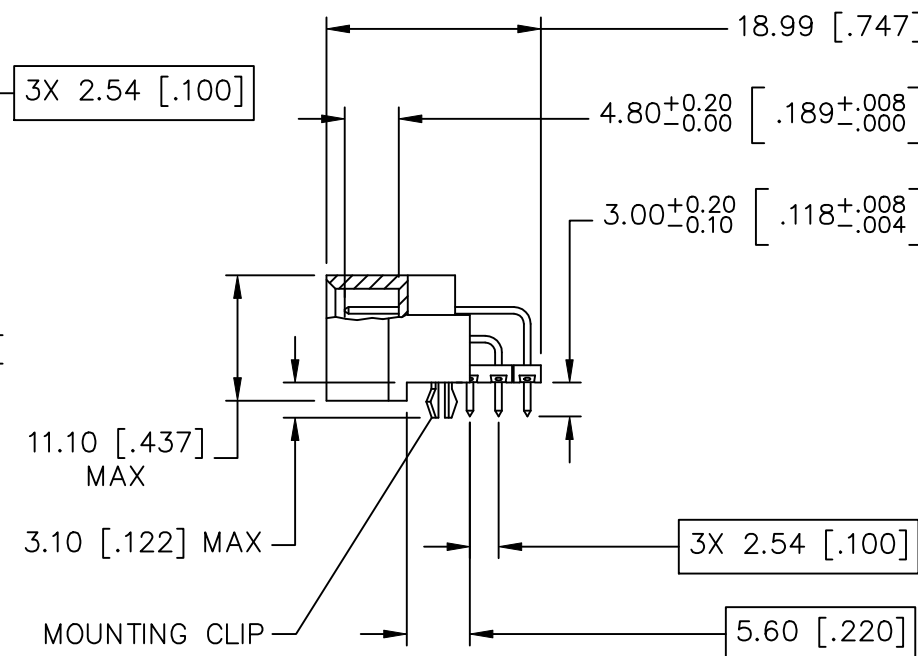
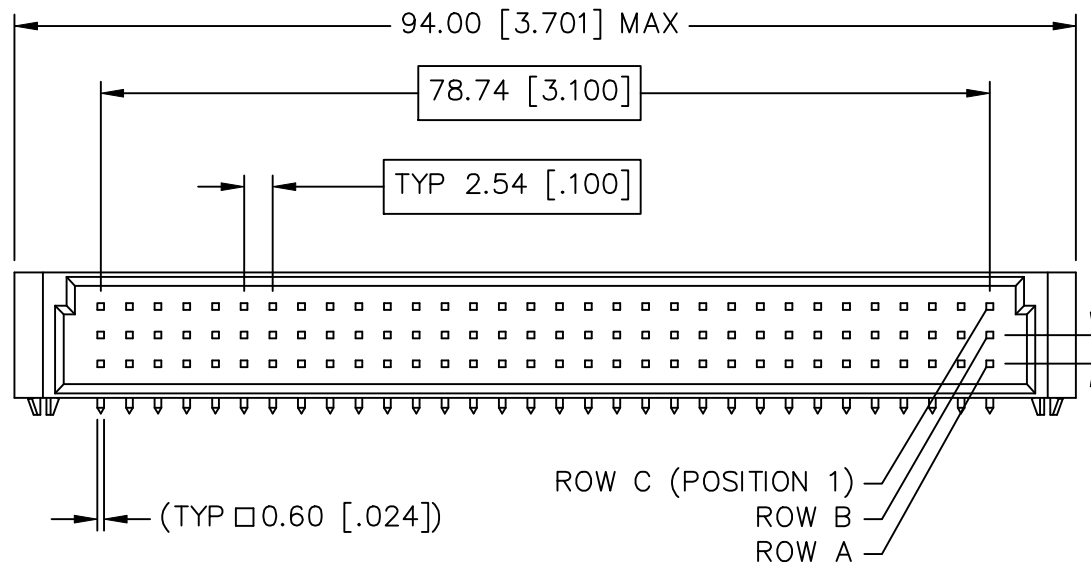
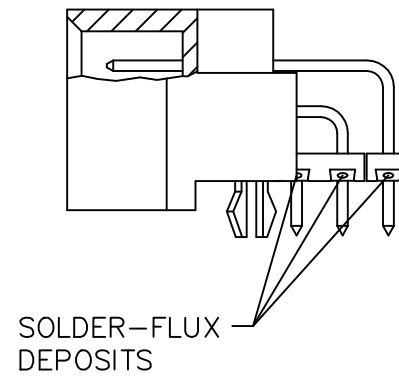


Rev	Description	Date	By
B	GENERAL UPDATE	12/16/02	JSC

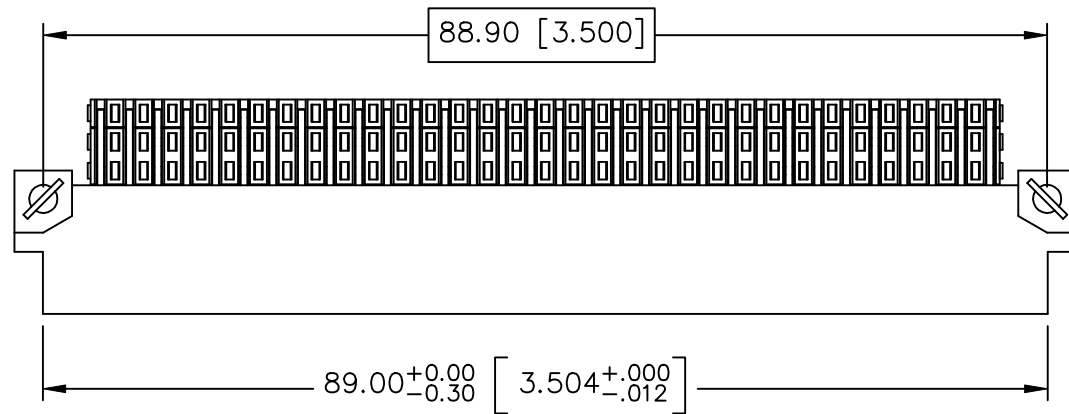

MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-V0
 CONTACT: COPPER ALLOY
 MOUNTING CLIP: STEEL
 SOLDER: 63-37 TIN-LEAD W/ NO-CLEAN FLUX

CONTACT FINISH:

INTERFACE AREA: 30 MICROINCHES GOLD
 SOLDER TAIL AREA: 100 MICROINCHES MIN TIN-LEAD
 UNDERPLATE: 50 MICROINCHES MIN NICKEL

PERFORMANCE CHARACTERISTICS - MECHANICAL


DURABILITY: 400 CYCLES MINIMUM
 OPERATING TEMP: -55°C TO +125°C


PERFORMANCE CHARACTERISTICS - ELECTRICAL

CONTACT RESISTANCE: 20 MILLIOHMS MAX INITIAL
 CURRENT CAPACITY: 1 AMP MAX PER CONTACT
 DIELECTRIC STRENGTH: 1000V (RMS)
 INSULATION RESISTANCE: 10,000 MEGAOHMS MIN

NOTES: UNLESS OTHERWISE SPECIFIED

- 1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M-1994
- 2 PRODUCT SHOWN ON THIS DRAWING CONFORMS TO ALL APPLICABLE DIN SPECIFICATIONS
- 3 FOR OTHER SIZES, FINISHES OR ADDITIONAL DATA CONTACT TEKA'S CUSTOMER SERVICE DEPARTMENT

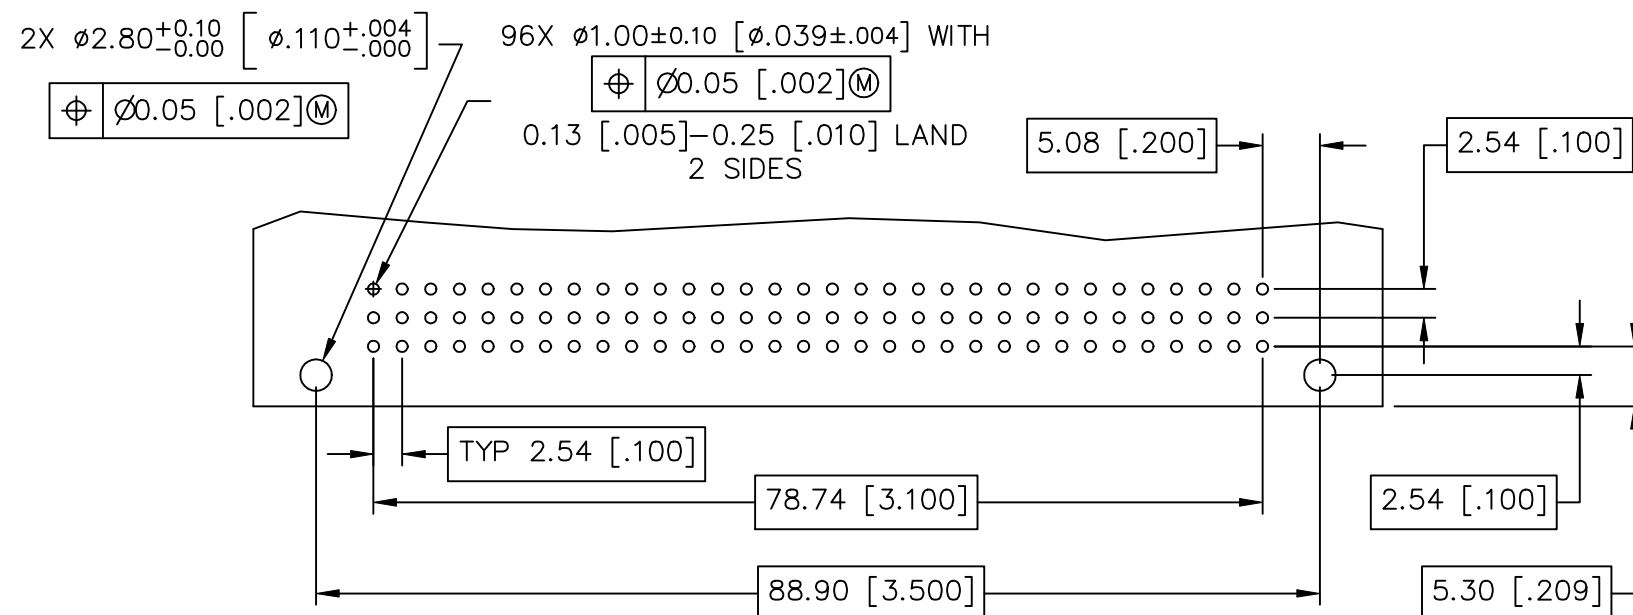

Unless otherwise specified: All dimensions are: mm [Inches]	Drawn by: J CACHINA	Date: 10/25/02	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com
	Checked by: JSC	Date: 10/28/02	
-Tolerances-	Title: SB 96 POSITION DIN 41612 MALE CONNECTOR		Part No: SDMS-3324L-D-000
No of places	mm	[IN]	
one	±0,5	±.020	
two	±0,25	±.010	
three	±0,13	±.005	
Angular	±2°		
	Ref No: S20259	Scale: 1.5:1	Sheet 1 of 1