

Rev	Description	Date	By
A	INITIAL RELEASE	05/18/04	JSC

**PART NUMBER DESCRIPTION**  
 SRC 2 425 126 - 0

**SERIES DESIGNATOR**  
 SRC - SHROUDED R/A HDR  
 .100 SPACING


**NUMBER OF ROWS**  
 2 - 2 ROW

**POSITIONS PER ROW**  
 05, 08, 10, 13, 17, 20, 25, 30, 32


**DESIGN VARIATION**  
 0 - STANDARD

**SOLDER TAIL LENGTH**  
 .126 [3.20] (AS SHOWN)

**SOLDER TYPE (TIN-LEAD 63-37)**  
 D - NO-CLEAN FLUX  
 U - SOLID CORE

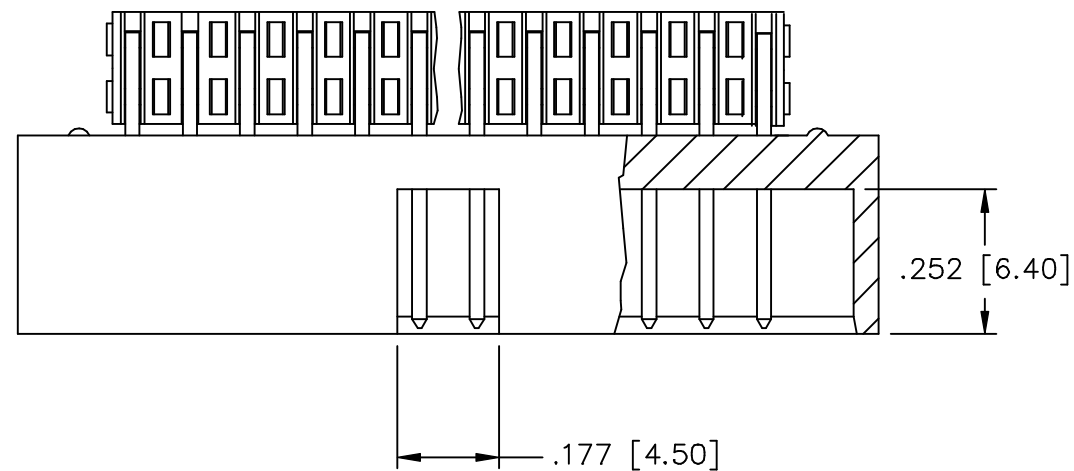

CONTACT FINISH DESIGNATION $\triangleleft 2$		
DESIGNATION	MATING ZONE	SOLDER TAIL
P	GOLD - 10 MICROINCHES	TIN-LEAD - 100 MICROINCHES

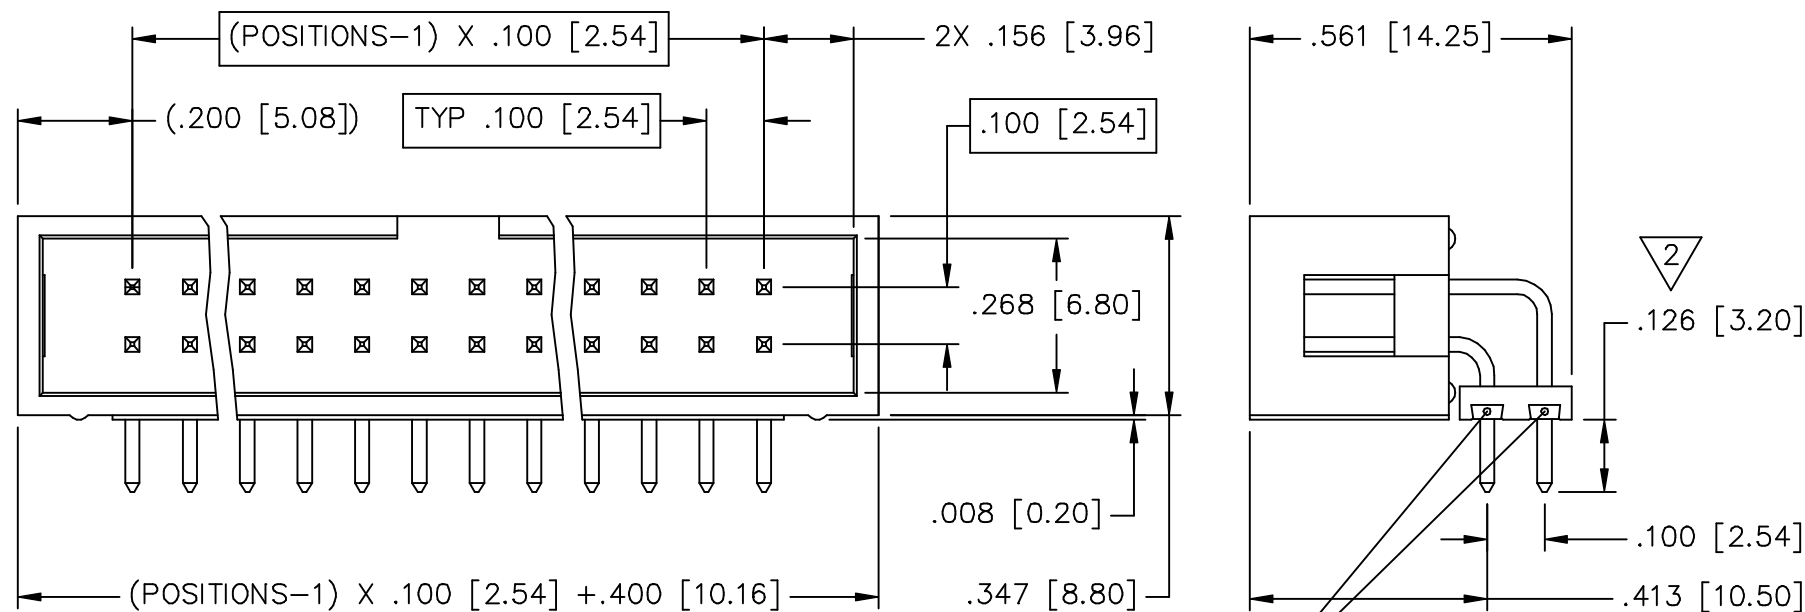

NOTES: UNLESS OTHERWISE SPECIFIED

1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994

$\triangleleft 2$  FOR OTHER SIZES, FINISHES, SOLDER TAIL LENGTHS OR ADDITIONAL DATA CONSULT TEKA CUSTOMER SERVICE

$\triangleleft 3$  CONNECTOR SOLDER VOLUME BASED ON APPLICATION TO A  $.062 \pm .007$  [1.58  $\pm$  0.18] THICK PRINTED CIRCUIT BOARD


MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-V0


CONTACT: COPPER ALLOY

SOLDER: SEE PART NUMBER DESCRIPTION

CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)

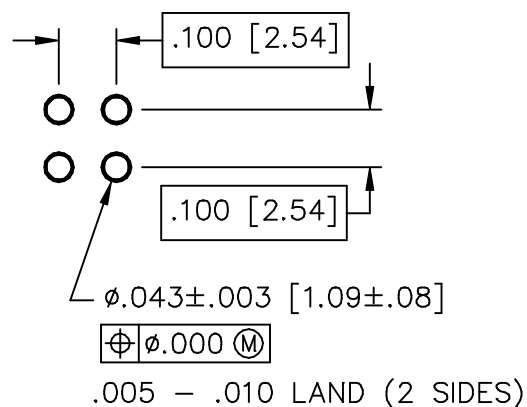

$\triangleleft 3$  RECOMMENDED PRINTED CIRCUIT BOARD HOLE CONFIGURATION

Unless otherwise specified: All dimensions are: Inches [mm]	Drawn by: J CACHINA	Date: 05/18/04	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com
	-Tolerances-		
No of places	IN	[mm]	Title: SB SHROUDED R/A HDR - .100 [2.54] PITCH Part No: SRC2___425_126-0
one	$\pm .1$	$\pm 2.54$	
two	$\pm .02$	$\pm 0.5$	
three	$\pm .010$	$\pm 0.25$	Ref No: S20409 Scale: 3:1 Sheet 1 of 1
Angular	$\pm 2^\circ$		