

REVISIONS		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE(SEE ESR#0102)	03-30-95	JWM

NOTES:

- MATERIALS AND FINISH:**
INSULATOR- GLASS FILLED THERMO-PLASTIC
POLYESTER, 94V-0 RATED, BLACK.
CONTACTS- CDA 725
CONTACT PLATING- .000030 Au OVER .000050 Ni ON
CONTACT POINT, TAIL .000100 MATE FINISH 60/40 SnPb


2. ELECTRICAL CHARACTERISTICS:

- CONTACT RESISTANCE:
CONTACT TO DAUGHTER CARD- 10 MILLIOMHS.
OPERATING VOLTAGE- 1800 VDC.
INSULATION RESISTANCE- 5000 MEGOHMS.
CONTACT CURRENT RATING- 5 AMPS AT 30C.


3. MECHANICAL CHARACTERISTICS:

- OPERATING TEMPERATURE- -55 TO +125C.
DURABILITY- PER BELLCORE TR-NWT-000078.

MARKING AS SHOWN.

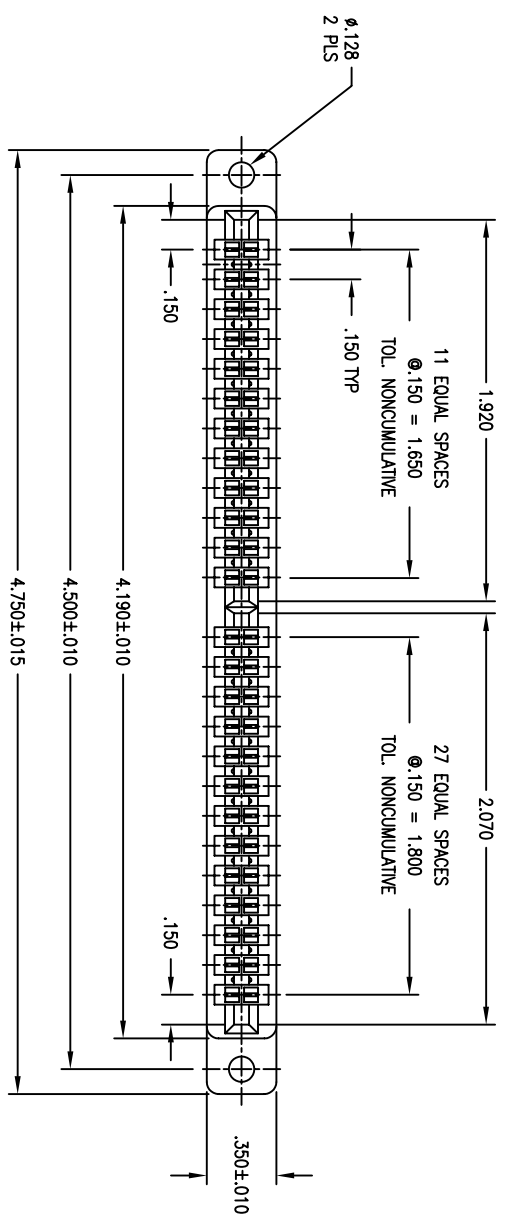

ACCEPTS
.054 - .071
P.C. BOARD

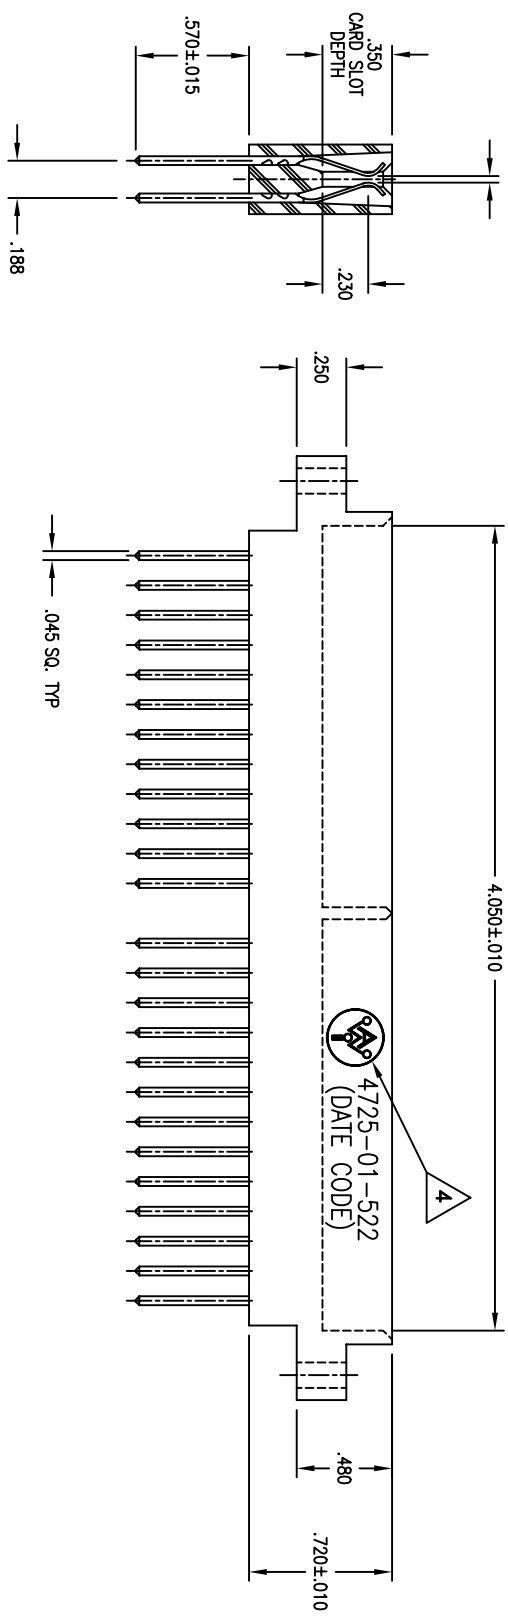

CUSTOMER DRAWING

APPROVED		TITLE
NAME	DATE	CARD EDGE CONNECTOR
DRAWN JWM	03-95	.156 X .188 CENTERS
CHECKED YL	03-95	
QUALITY WBK	03-95	
APPROVED JWM	05-95	

THE INFORMATION, DATA AND/OR SERVICE CONTAINED ON THIS DRAWING ARE PROPRIETARY TO A.W. INDUSTRIES AND MAY NOT BE COPIED, REPRODUCED OR DISCLOSED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION FROM A.W. INDUSTRIES.

ALL DIMENSIONS ARE IN INCHES.
TOLERANCES:
DECIMAL .XX ±.015
XXX ±.005
ANGLE ±1/2°

A.W. Industries, Incorporated
6788 N.W. 17th AVENUE
Fort Lauderdale, FL 33309

SIZE: NONE
SCALE: NONE
DWG. NO.: 4725-01-522
ACAD FILE NO.: 03-0054-0A
SHEET 1 OF 1