


Rev	Description	Date	By
A	INITIAL RELEASE	02/10/12	JSC

PART NUMBER DESCRIPTION

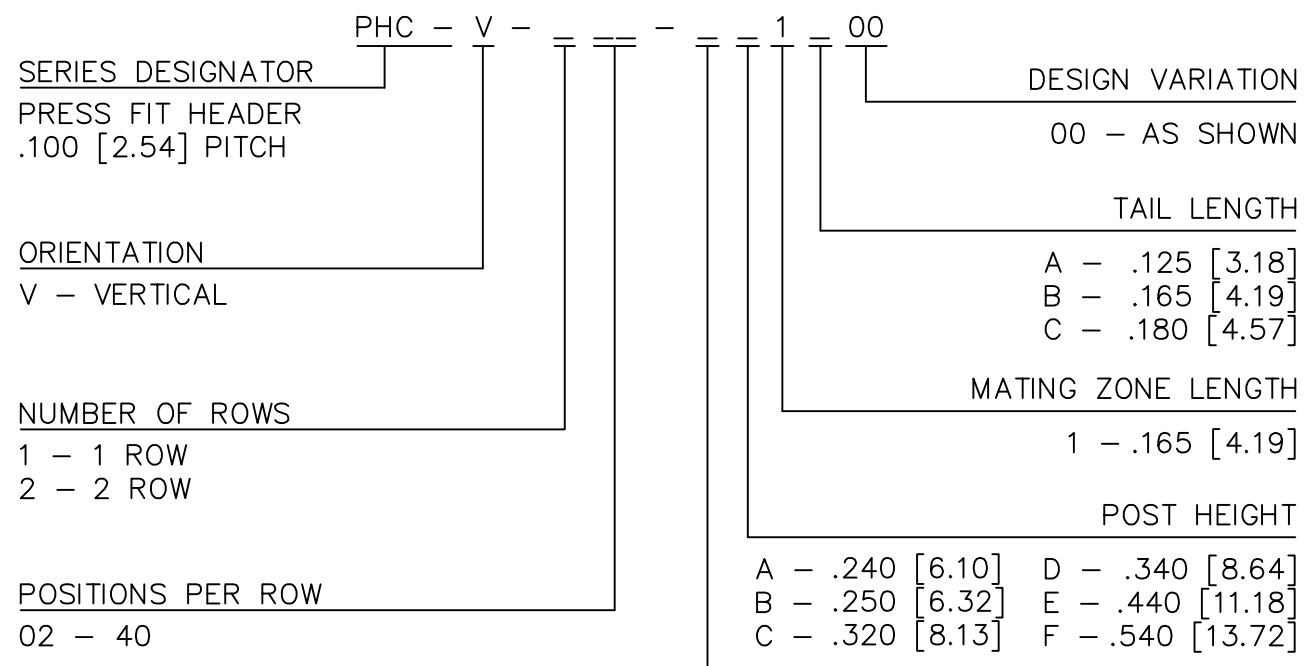

CONTACT FINISH DESIGNATION		
DESIGNATION	MATING ZONE	PCB INTERFACE
C	GOLD - FLASH	PURE TIN
B	GOLD - 10 MICROINCHES	
M	GOLD - 15 MICROINCHES	
H	GOLD - 30 MICROINCHES	
O	PURE TIN - 100 MICROINCHES	



- NOTES: UNLESS OTHERWISE SPECIFIED
- INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994
 - FOR OTHER SIZES AND FINISHES OR FOR ADDITIONAL DATA CONSULT TEKA'S CUSTOMER SERVICE DEPARTMENT
 - RECOMMENDED DRILL SIZE = $.0453 \pm .0010$ [1.151 ± 0.025]
RECOMMENDED MIN COPPER THICKNESS = $.001$ [0.025]


MATERIALS:

HOUSING: THERMOPLASTIC, UL RATED 94-V0

CONTACT: COPPER ALLOY

CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)

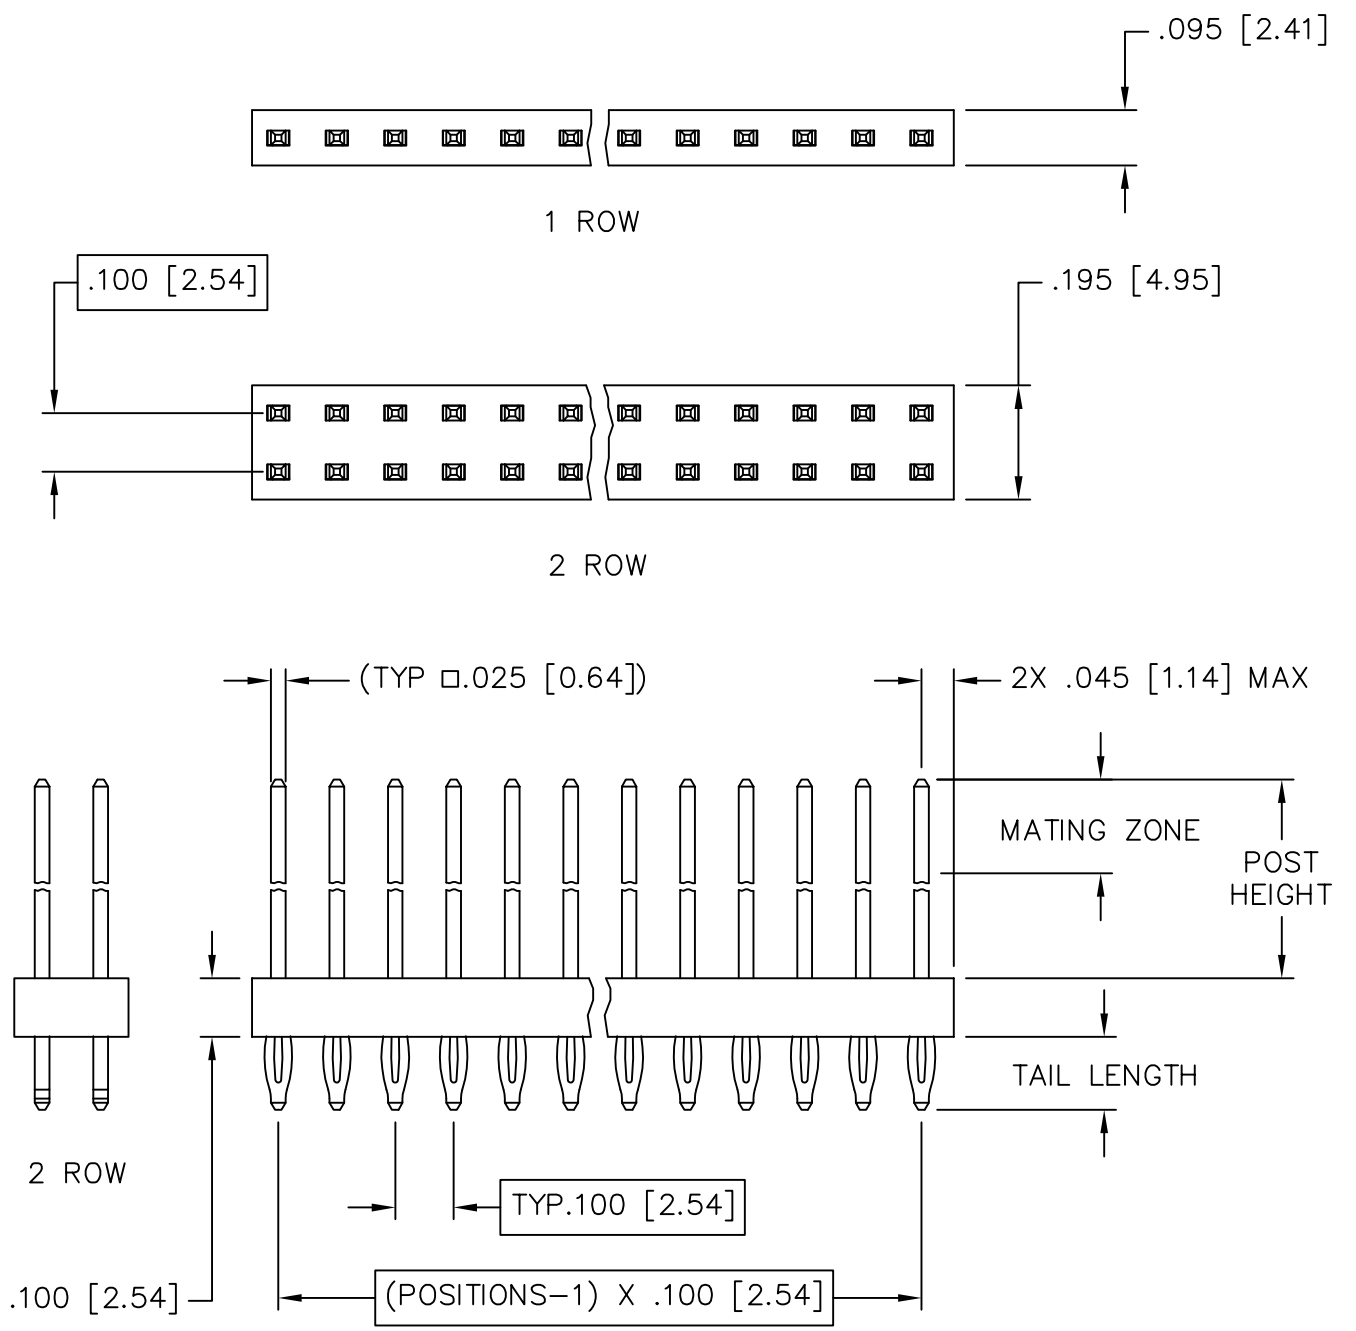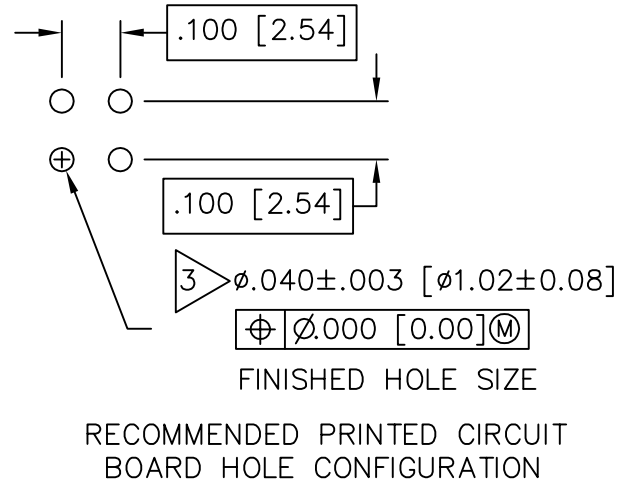

Unless otherwise specified: All dimensions are: Inches [mm]	Drawn by: J CACHINA	Date: 02/09/12	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@tekais.com
	Checked by: JSC	Date: 02/10/12	
No of places one $\pm .1$ $\pm 2,54$ two $\pm .02$ $\pm 0,5$ three $\pm .010$ $\pm 0,25$	Title: ROHS COMPLIANT PRESS FIT VERTICAL HEADER - .025 [0.64] X.100 [2.54]		Part No: PHC-V-___-__1_00
Angular $\pm 2^\circ$	Ref No: S21202	Scale: 3:1	Sheet 1 of 1