




REV		DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	(ESR 0186)	05-18-95	JWM

REVISIONS

NOTES:

1. MATERIALS AND FINISH:  
INSULATOR- GLASS FILLED THERMO-PLASTIC  
POLYESTER, 94V-0 RATED, BLACK.  
CONTACTS- CDA 510  
CONTACT PLATING- .000030 Au OVER .000050 Ni ON  
CONTACT POINT, TAIL .000100 MATTE FINISH 60/40 SnPb.
2. ELECTRICAL CHARACTERISTICS:  
CONTACT RESISTANCE- 10 MILLIOHMS  
OPERATING VOLTAGE- 1500 VDC  
INSULATION RESISTANCE- 5000 MEGOHMS.  
CONTACT CURRENT RATING- 5 AMPS AT 30°C.
3. MECHANICAL CHARACTERISTICS:  
OPERATING TEMPERATURE- -55° TO +125°C.  
DURABILITY- PER BELLORE TR-NWT-000078.

MARKING AS SHOWN.

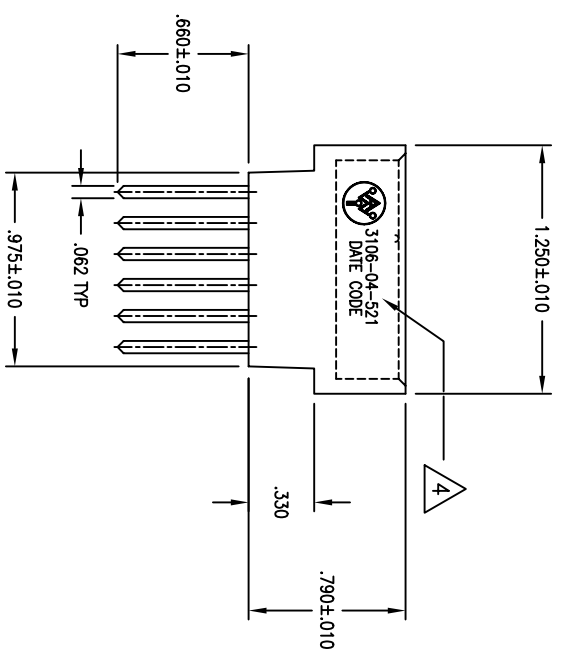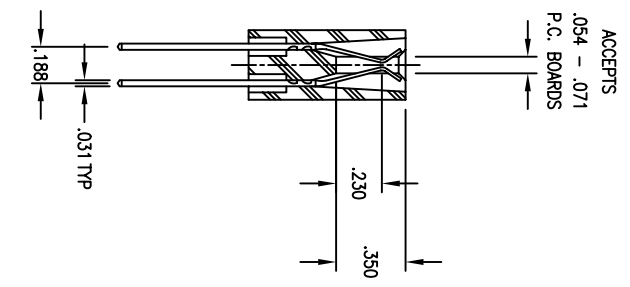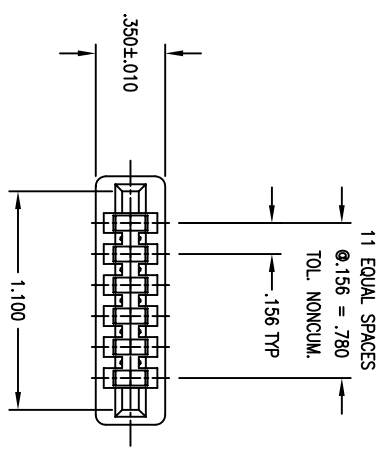

CUSTOMER DRAWING

APPROVED		DATE	
NAME	JWM	DATE	05-95
CHECKED	YL	DATE	05-95
QUALITY	WBK	DATE	05-95
APPROVED	JWM	DATE	05-95

ALL DIMENSIONS ARE IN INCHES.

TOLERANCES:  
DECIMAL .XX ±.015  
XXX ±.005  
ANGLE ±1/2°

THE INFORMATION, DATA AND/OR SERVICES CONTAINED ON THIS DRAWING ARE PROPRIETARY TO A.W. INDUSTRIES AND MAY NOT BE COPIED, REPRODUCED OR DISCLOSED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF A.W. INDUSTRIES.

**A.W. Industries, Incorporated**  
6788 N.W. 17th AVENUE  
Fort Lauderdale, FL 33309

CARD EDGE CONNECTOR .156 X .188

SIZE C  
SCALE NONE  
DWG. NO. 3106-04-521  
SHEET 1 OF 1